

FQA24N60-VB Datasheet

N-Channel 600 V (D-S) Super Junction MOSFET

PRODUCT SUMMARY						
V _{DS} (V) at T _J max.	600					
R _{DS(on)} (Ω) at 25 °C	$V_{GS} = 10 V$	0.19				
Q _g max. (nC)	106					
Q _{gs} (nC)	14					
Q _{gd} (nC)	33					
Configuration	Single					

FEATURES

- Reduced t_{rr}, Q_{rr}, and I_{RRM}
- Low figure-of-merit (FOM) $R_{on} \times Q_g$
- Low input capacitance (C_{iss})
- Low switching losses due to reduced Q_{rr}
- Ultra low gate charge (Q_q)
- Avalanche energy rated (UIS)

APPLICATIONS

- Telecommunications
 - Server and telecom power supplies
- Lighting
 - High-intensity discharge (HID)
 - Fluorescent ballast lighting
- Consumer and computing
 - ATX power supplies
- Industrial
 - Welding
 - Battery chargers
- Renewable energy
- Solar (PV inverters)
- Switch mode power supplies (SMPS)

TO-3P	
GD	D (TAB)
S	
	G ○ →↓ Ĕ → Ť
	S

N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS (T _C :	= 25 °C, unl	ess otherwis	se noted)			
PARAMETER			SYMBOL	LIMIT	UNIT	
Drain-Source Voltage			V _{DS}	600	V	
Gate-Source Voltage			V _{GS}	± 30		
Continuous Drain Current (T _J = 150 °C)	V _{GS} at 10 V	T _C = 25 °C	- I _D	20		
		T _C = 100 °C		13	А	
Pulsed Drain Current ^a			I _{DM}	53		
Linear Derating Factor				1.7	W/°C	
Single Pulse Avalanche Energy ^b			E _{AS}	367	mJ	
Maximum Power Dissipation			PD	208	W	
Operating Junction and Storage Temperature Range			T _J , T _{stg}	-55 to +150	°C	
Drain-Source Voltage Slope	T _J = 125 °C		dV/dt	37	V/ns	
Reverse Diode dV/dt ^d		av/dt	31	v/ns		
Soldering Recommendations (Peak Temperature) ^c	for 10 s			300	°C	
Soldering Recommendations (Peak Temperature)	for 10 s			300	°C	

Notes

a. Repetitive rating; pulse width limited by maximum junction temperature. b. $V_{DD} = 50$ V, starting T_J = 25 °C, L = 28.2 mH, R_g = 25 Ω , I_{AS} = 5.1 A.

c. 1.6 mm from case.

d. $I_{SD} \leq I_D$, dl/dt = 100 A/µs, starting T_J = 25 °C.



COMPLIANT

HALOGEN FREE



INGS								
SYMBOL	TYP.		MAX.		UNIT			
R _{thJA}	- 62				00.00			
R _{thJC}	-		0.5		°C/W			
•								
unless otherwi	se noted)							
SYMBOL		T CONDIT	IONS	MIN.	TYP.	MAX.	UNIT	
	1						1	
V _{DS}	V _{GS} :	= 0 V, I _D =	250 µA	600	-	-	V	
$\Delta V_{DS}/T_{J}$				-	0.67	-	V/°C	
V _{GS(th)}	V _{DS} =			2	-	4	V	
1	$V_{GS} = \pm 20 V$ $V_{GS} = \pm 30 V$		-	-	± 100	nA		
IGSS			-	-	± 1	μA		
	V _{DS} =	$V_{DS} = 520 \text{ V}, V_{GS} = 0 \text{ V}$		-	-	1	μA	
IDSS	V _{DS} = 520 \			-	-	500		
R _{DS(on)}	V _{GS} = 10 V	I	_D = 11 A	-	0.19	-	Ω	
9 _{fs}	V _{DS}	= 30 V, I _D :	= 11 A	-	7.0	-	S	
-	*							
C _{iss}	$V_{GS} = 0 V,$ $V_{DS} = 100 V,$ f = 1 MHz		-	2322	-	pF		
C _{oss}			-	105	-			
C _{rss}			-	4	-			
C _{o(er)}	$V_{\rm DS}$ = 0 V to 520 V, $V_{\rm GS}$ = 0 V		-	84	-			
C _{o(tr)}			-	293	-			
Qg				-	71	106	nC	
Q _{gs}	$V_{GS} = 10 \text{ V}$ $I_D = 11 \text{ A}, V_{DS} = 520 \text{ C}$		A, V _{DS} = 520 V	-	14	-		
Q _{gd}				-	33	-		
t _{d(on)}	V_{DD} = 520 V, I_D = 11 A, V_{GS} = 10 V, R_g = 9.1 Ω		-	22	44	- ns		
t _r			-	34	68			
t _{d(off)}			-	68	102			
t _f			-	42	84			
R _g	f = 1 MHz, open drain		-	0.78	-	Ω		
cs								
١ _S	MOSFET symbol showing the integral reverse p - n junction diode		-	-	21	A		
I _{SM}			-	-	53			
	T _J = 25 °C, I _S = 11 A, V _{GS} = 0 V		-	0.9	1.2	V		
V _{SD}								
	-			-	160	-	ns	
V _{SD} t _{rr} Q _{rr}	T _J = 2	5 °C, Ι _F = Ι _ξ 100 Α/μs, '	_S = 11 A,	-	160 1.2	-	ns µC	
	RthJA RthJC SYMBOL VDS ΔVDs/TJ VGS(th) IGSS IDSS RDS(on) 9fs Ciss Coss Crss Co(er) Co(er) Qg Qgd td(on) tr tf Rg ics Is Is	$\begin{tabular}{ c c c c } \hline SYMBOL & TYP. \\ \hline $R_{th,JA} & - \\ \hline $R_{th,JC} & - \\ \hline $R_{th,JC} & - \\ \hline $SYMBOL & TES \\ \hline $V_{DS} & V_{GS} & \\ \hline $V_{DS} & V_{GS} & \\ \hline $V_{DS}/T_J & Referenc & \\ \hline $V_{DS}/T_J & Referenc & \\ \hline $V_{DS}/T_J & Referenc & \\ \hline $V_{DS} & V_{DS} & \\ \hline $V_{DS} & S^{T} & \\ \hline $V_{DS} & \hline $V_{DS} & \\ \hline $V_{DS} & S^{T} & \\ \hline $V_{DS} & \\ \hline $V_{DS} & $	SYMBOLTYP. R_{thJA} - R_{thJC} -unless otherwise noted)SYMBOLTEST CONDIT V_{DS} $V_{GS} = 0 V, I_D =$ $\Delta V_{DS}/T_J$ Reference to 25 °C, $V_{GS}(th)$ $V_{DS} = V_{GS}, I_D =$ $V_{GS}(th)$ $V_{DS} = V_{GS}, I_D =$ $V_{GS}(th)$ $V_{DS} = 520 V, V_G = 10 V$ I_{DSS} $V_{DS} = 520 V, V_{GS} = 0 V$ I_{DSS} $V_{DS} = 10 V$ I_{SS} $V_{GS} = 10 V$ I_{Coss} $V_{DS} = 0 V$ to 520 V, I_D Q_{g} $V_{DS} = 0 V$ to 520 V, I_D Q_{g} $V_{GS} = 10 V$ $I_{D} = 11$ Q_{gs} $I_{d(off)}$ $V_{GS} = 10 V$ I_{f} $V_{DD} = 520 V, I_D$ $V_{GS} = 10 V, R_{g}$ I_{S} MOSFET symbolshowing theintegral reverse $P - n$ junction diode	$\begin{tabular}{ c c c c } \hline SYMBOL & TYP. & MAX. \\ \hline $R_{th,JA}$ & - & 62 \\ \hline $R_{th,JC}$ & - & 0.5 \\ \hline \hline $SYMBOL & TEST CONDITIONS \\ \hline \hline $SYMBOL & TEST CONDITIONS \\ \hline \hline $SYMBOL & TEST CONDITIONS \\ \hline V_{DS} & $V_{GS} = 0 V, I_D = 250 \ \mu A \\ \hline $\Delta V_{DS}/T_J$ & Reference to 25 °C, I_D = 1 mA \\ \hline $V_{GS}(th)$ & $V_{DS} = V_{GS}, I_D = 250 \ \mu A \\ \hline $V_{GS} = \pm 20 \ V$ \\ \hline I_{GSS} & $V_{GS} = \pm 20 \ V$ \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V$ \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V$ \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V$ \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V$ \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V$ \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V$ \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V$ \\ \hline $V_{DS} = 100 \ V$ \\ \hline $V_{DS} = 100 \ V$ \\ \hline C_{coss} & $V_{DS} = 100 \ V$ \\ \hline C_{coss} & $V_{DS} = 100 \ V$ \\ \hline C_{coss} & $V_{DS} = 100 \ V$ \\ \hline C_{coss} & $V_{DS} = 100 \ V$ \\ \hline C_{cotr} & $V_{DS} = 0 \ V$ to 520 \ V$ V_{GS} = 0 \ V$ \\ \hline $C_{o(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{o(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{o(tr)$ & $V_{DS} = 10 \ V$ \\ \hline C_{agd} & $V_{GS} = 10 \ V$ \\ \hline C_{agd} & $V_{CS} = 10 \ V$ \\ \hline C_{bc} = 1 \ MHz$ & $V_{DS} = 520 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 520 \ V$, $V_{GS} = 0 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 520 \ V$, $V_{GS} = 0 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 520 \ V$, $V_{GS} = 0 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 10 \ V$ \\ \hline $C_{a(tr)$ & $V_{DS} = 1$	$\begin{tabular}{ c c c c c } \hline SYMBOL & TYP. & MAX. \\ \hline R_{thJA} & - & 62 \\ \hline R_{thJC} & - & 0.5 \\ \hline \hline $Unless otherwise noted] \\ \hline $SYMBOL & TEST CONDITIONS & MIN. \\ \hline V_{DS} & $V_{GS} = 0 V, I_D = 250 \ \mu A & 600 \\ \hline $\Delta V_{DS}/T_J$ & Reference to 25 °C, I_D = 1 mA & - \\ \hline $V_{GS}(th)$ & $V_{DS} = V_{GS}, I_D = 250 \ \mu A & 2 \\ \hline $V_{GS} = 10 V$ & $V_{GS} = 250 \ \mu A & 2 \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V & - \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V & - \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V & T_J = 125 \ ^{\circ}C & - \\ \hline $R_{DS}(on)$ & $V_{GS} = 10 \ V$ & $I_D = 11 \ A $- \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V, T_J = 125 \ ^{\circ}C & - \\ \hline $R_{DS}(on)$ & $V_{GS} = 10 \ V$ & $I_D = 11 \ A $- \\ \hline $V_{DS} = 30 \ V, I_D = 11 \ A $- \\ \hline $V_{DS} = 100 \ V$ & $I_D = 11 \ A $- \\ \hline $V_{DS} = 100 \ V, I_D = 11 \ A $- \\ \hline $V_{DS} = 100 \ V, I_D = 11 \ A $- \\ \hline $V_{DS} = 100 \ V$ & $I_D = 11 \ A $- \\ \hline $V_{DS} = 100 \ V, I_D = 11 \ A $- \\ \hline $V_{DS} = 100 \ V, I_D = 11 \ A $- \\ \hline $V_{DS} = 100 \ V$ & $V_{DS} = 100 \ V$ $- \\ \hline $V_{DS} = 100 \ V, I_D = 11 \ A $- \\ \hline $V_{DS} = 100 \ V, I_D = 11 \ A $- \\ \hline $V_{DS} = 0 \ V$ to 520 \ V, V_{GS} = 0 \ V$ $- \\ \hline $V_{DS} = 0 \ V$ to 520 \ V, V_{GS} = 0 \ V$ $- \\ \hline $V_{DS} = 10 \ V$ $V_{DS} = 520 \ V$ $- \\ \hline $V_{DS} = 10 \ V$ \ A $- \\ \hline $V_{DS} = 10 \ V$ \ A $- \\ \hline $V_{DS} = 10 \ V$ \ A $- \\ \hline $V_{Co(tr)}$ & $- \\ \hline $V_{DS} = 10 \ V$ \ N_{SS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $A \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = 10 \ V$ \ A $- \\ \hline $V_{CS} = $	$\begin{tabular}{ c c c c c } \hline $YMBOL & TYP. & MAX. \\ \hline $R_{th,JA} & - & 62 \\ \hline $R_{th,JC} & - & 0.5 \\ \hline $Unless otherwise noted] \\ \hline $YMBOL & TEST CONDITIONS & MIN. $TYP. \\ \hline $V_{DS} & V_{GS} = 0 V, I_D = 250 \ \mu A & - & 0.67 \\ \hline $V_{DS}/T_J & Reference to 25 \ ^{\circ}C, I_D = 1 \ m A & - & 0.67 \\ \hline $V_{GS}(th) & V_{DS} = V_{GS}, I_D = 250 \ \mu A & 2 & - \\ \hline $V_{GS}(th) & V_{DS} = 520 \ V, C_{SS} = 420 \ V & - & - \\ \hline $V_{GS} = 520 \ V, V_{GS} = 0 \ V & - & - \\ \hline $V_{DS} = 520 \ V, V_{GS} = 0 \ V & - & - \\ \hline $V_{DS} = 520 \ V, V_{CS} = 0 \ V & - & - \\ \hline $V_{DS} = 520 \ V, V_{CS} = 0 \ V & - & - \\ \hline $V_{DS} = 520 \ V, V_{CS} = 0 \ V & - & - \\ \hline $V_{DS} = 520 \ V, V_{CS} = 0 \ V, T_J = 125 \ ^{\circ}C & - & - \\ \hline $R_{DS}(on) & V_{GS} = 10 \ V & I_D = 11 \ A & - & 0.19 \\ \hline $g_{fs} & V_{DS} = 30 \ V, I_D = 11 \ A & - & 0.19 \\ \hline $g_{fs} & V_{DS} = 100 \ V, f = 1 \ MHz & - & 7.0 \\ \hline \hline $C_{res} & V_{DS} = 10 \ V, OS = 0 \ V \ V_{DS} = 100 \ V, f = 1 \ MHz & - & 4 \\ \hline $C_{o}(er) $V_{CS} = 10 \ V \ V_{DS} = 0 \ V \ V_{DS} = 520 \ V, V_{GS} = 0 \ V \\ \hline $c_{res} & V_{CS} = 10 \ V, R_{g} = 9 \ V \\ \hline $c_{res} & V_{CS} = 10 \ V \ I_D = 11 \ A, \ V_{DS} = 520 \ V \ - & 14 \\ \hline $C_{o}(er) $V_{CS} = 10 \ V, R_{g} = 9.1 \ \Omega \\ \hline $c_{res} & T \ 1 \ A \ C_{SS} & A \ C_{O}(r) $V_{CS} = 10 \ V, R_{g} = 9.1 \ \Omega \\ \hline \hline $c_{res} & T \ A \ C_{SS} & A \ C_{$	$\begin{tabular}{ c c c c c c } \hline SYMBOL & TYP. & MAX. & UNIT \\ \hline $R_{th,JC} & - & 0.5 & \end{tabular} tabul$	

Notes

a. $C_{oss(er)}$ is a fixed capacitance that gives the same energy as C_{oss} while V_{DS} is rising from 0 % to 80 % V_{DSS} . b. $C_{oss(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 % to 80 % V_{DSS} .



TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

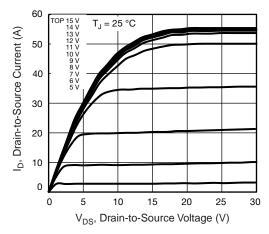


Fig. 1 - Typical Output Characteristics



Fig. 2 - Typical Output Characteristics

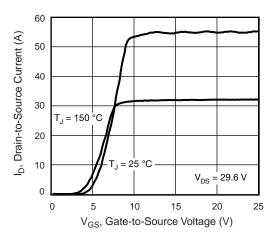


Fig. 3 - Typical Transfer Characteristics




Fig. 4 - Normalized On-Resistance vs. Temperature

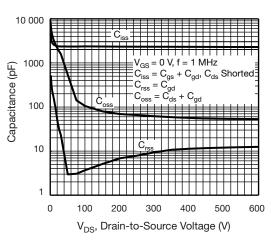


Fig. 5 - Typical Capacitance vs. Drain-to-Source Voltage

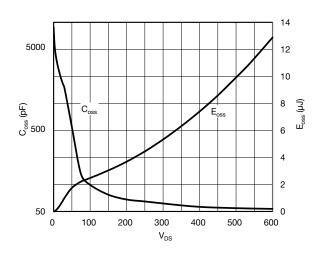


Fig. 6 - C_{oss} and E_{oss} vs. V_{DS}






Fig. 7 - Typical Gate Charge vs. Gate-to-Source Voltage

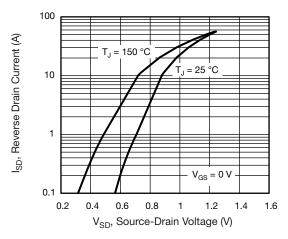


Fig. 8 - Typical Source-Drain Diode Forward Voltage

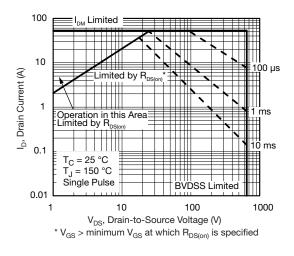


Fig. 9 - Maximum Safe Operating Area

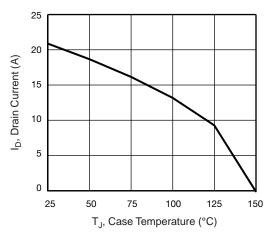


Fig. 10 - Maximum Drain Current vs. Case Temperature



Fig. 11 - Temperature vs. Drain-to-Source Voltage





Fig. 12 - Normalized Thermal Transient Impedance, Junction-to-Case




Fig. 13 - Switching Time Test Circuit




Fig. 14 - Switching Time Waveforms

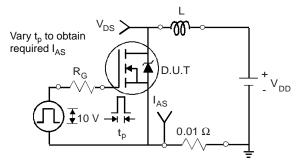


Fig. 15 - Unclamped Inductive Test Circuit




Fig. 16 - Unclamped Inductive Waveforms






Fig. 17 - Basic Gate Charge Waveform





Peak Diode Recovery dV/dt Test Circuit

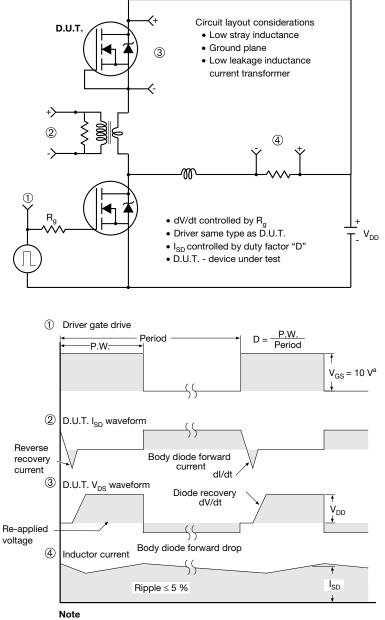

a. $V_{GS} = 5$ V for logic level devices

Fig. 19 - For N-Channel



Disclaimer

All products due to improve reliability, function or design or for other reasons, product specifications and data are subject to change without notice.

Taiwan VBsemi Electronics Co., Ltd., branches, agents, employees, and all persons acting on its or their representatives (collectively, the "Taiwan VBsemi"), assumes no responsibility for any errors, inaccuracies or incomplete data contained in the table or any other any disclosure of any information related to the product.(www.VBsemi.com)

Taiwan VBsemi makes no guarantee, representation or warranty on the product for any particular purpose of any goods or continuous production. To the maximum extent permitted by applicable law on Taiwan VBsemi relinquished: (1) any application and all liability arising out of or use of any products; (2) any and all liability, including but not limited to special, consequential damages or incidental; (3) any and all implied warranties, including a particular purpose, non-infringement and merchantability guarantee.

Statement on certain types of applications are based on knowledge of the product is often used in a typical application of the general product VBsemi Taiwan demand that the Taiwan VBsemi of. Statement on whether the product is suitable for a particular application is non-binding. It is the customer's responsibility to verify specific product features in the products described in the specification is appropriate for use in a particular application. Parameter data sheets and technical specifications can be provided may vary depending on the application and performance over time. All operating parameters, including typical parameters must be made by customer's technical experts validated for each customer application. Product specifications do not expand or modify Taiwan VBsemi purchasing terms and conditions, including but not limited to warranty herein.

Unless expressly stated in writing, Taiwan VBsemi products are not intended for use in medical, life saving, or life sustaining applications or any other application. Wherein VBsemi product failure could lead to personal injury or death, use or sale of products used in Taiwan VBsemi such applications using client did not express their own risk. Contact your authorized Taiwan VBsemi people who are related to product design applications and other terms and conditions in writing.

The information provided in this document and the company's products without a license, express or implied, by estoppel or otherwise, to any intellectual property rights granted to the VBsemi act or document. Product names and trademarks referred to herein are trademarks of their respective representatives will be all.

Material Category Policy

Taiwan VBsemi Electronics Co., Ltd., hereby certify that all of the products are determined to be RoHS compliant and meets the definition of restrictions under Directive of the European Parliament 2011/65 / EU, 2011 Nian. 6. 8 Ri Yue restrict the use of certain hazardous substances in electrical and electronic equipment (EEE) - modification, unless otherwise specified as inconsistent.(www.VBsemi.com)

Please note that some documents may still refer to Taiwan VBsemi RoHS Directive 2002/95 / EC. We confirm that all products identified as consistent with the Directive 2002/95 / EC European Directive 2011/65 /.

Taiwan VBsemi Electronics Co., Ltd. hereby certify that all of its products comply identified as halogen-free halogen-free standards required by the JEDEC JS709A. Please note that some Taiwanese VBsemi documents still refer to the definition of IEC 61249-2-21, and we are sure that all products conform to confirm compliance with IEC 61249-2-21 standard level JS709A.