

## AM7435P-T1-PF-VB Datasheet

### P-Channel 30-V (D-S) MOSFET

#### PRODUCT SUMMARY

| $V_{DS}$ (V) | $R_{DS(on)}$ ( $\Omega$ )  | $I_D$ (A) <sup>a</sup> | $Q_g$ (Typ.) |
|--------------|----------------------------|------------------------|--------------|
| - 30         | 0.004 at $V_{GS} = -10$ V  | - 120                  | 130 nC       |
|              | 0.006 at $V_{GS} = -4.5$ V | - 100                  |              |



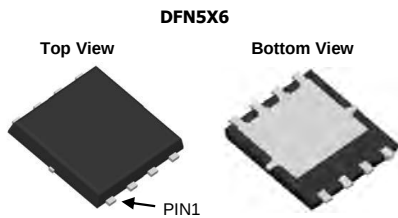
#### FEATURES

- Halogen-free
- Trench Power MOSFET
- 100 % R<sub>g</sub> Tested



#### APPLICATIONS

- Notebook
- Load Switch



P-Channel MOSFET

#### ABSOLUTE MAXIMUM RATINGS $T_A = 25$ °C, unless otherwise noted

| Parameter                                                    | Symbol         | Limit         | Unit |
|--------------------------------------------------------------|----------------|---------------|------|
| Drain-Source Voltage                                         | $V_{DS}$       | - 30          | V    |
| Gate-Source Voltage                                          | $V_{GS}$       | $\pm 20$      |      |
| Continuous Drain Current ( $T_J = 150$ °C)                   | $I_D$          | $T_C = 25$ °C | A    |
|                                                              |                | $T_C = 70$ °C |      |
|                                                              |                | $T_A = 25$ °C |      |
|                                                              |                | $T_A = 70$ °C |      |
| Pulsed Drain Current                                         | $I_{DM}$       | - 280         | mJ   |
| Continuous Source-Drain Diode Current                        | $I_S$          | $T_C = 25$ °C |      |
|                                                              |                | $T_A = 25$ °C |      |
| Single Pulse Avalanche Current                               | $I_{AS}$       | - 60          |      |
| Single Pulse Avalanche Energy                                | $E_{AS}$       | 160           |      |
| Maximum Power Dissipation                                    | $P_D$          | $T_C = 25$ °C | W    |
|                                                              |                | $T_C = 70$ °C |      |
|                                                              |                | $T_A = 25$ °C |      |
|                                                              |                | $T_A = 70$ °C |      |
| Operating Junction and Storage Temperature Range             | $T_J, T_{stg}$ | - 55 to 150   | °C   |
| Soldering Recommendations (Peak Temperature) <sup>d, e</sup> |                | 260           |      |

#### THERMAL RESISTANCE RATINGS

| Parameter                                   | Symbol     | Typical | Maximum | Unit |
|---------------------------------------------|------------|---------|---------|------|
| Maximum Junction-to-Ambient <sup>b, f</sup> | $R_{thJA}$ | 15      | 20      | °C/W |
| Maximum Junction-to-Case (Drain)            | $R_{thJC}$ | 0.9     | 1.2     |      |

Notes:

a. Package limited.

b. Surface Mounted on 1" x 1" FR4 board.

c.  $t = 10$  s.

d. The DFN5x6 is a leadless package. The end of the lead terminal is exposed

copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper tip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection.

e. Rework Conditions: manual soldering with a soldering iron is not recommended for leadless components.

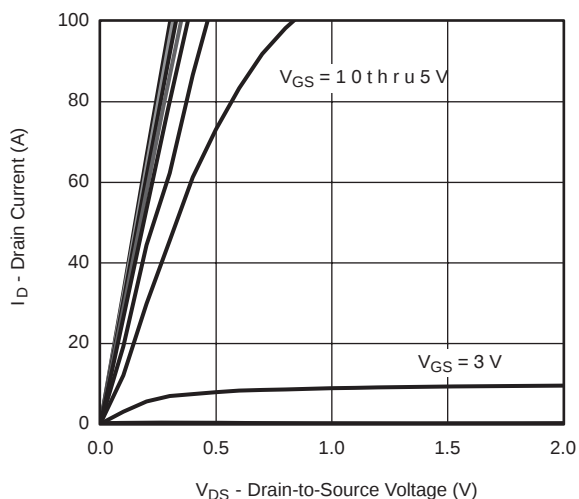
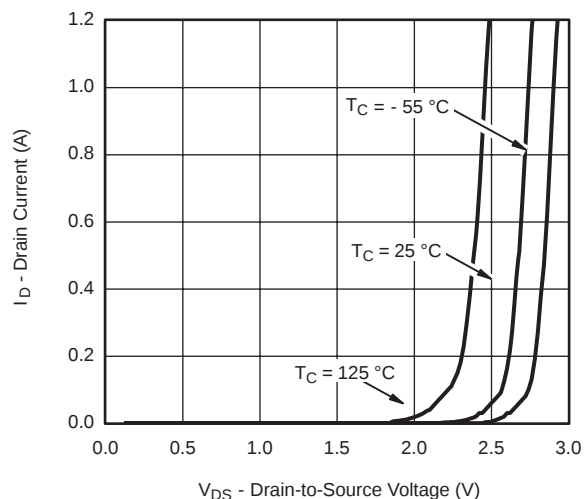
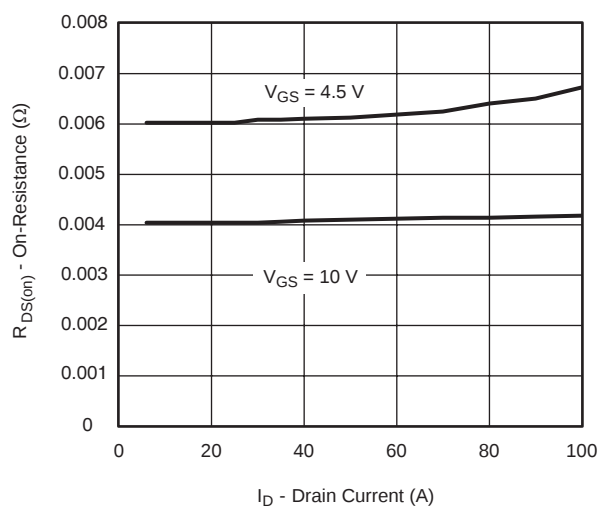
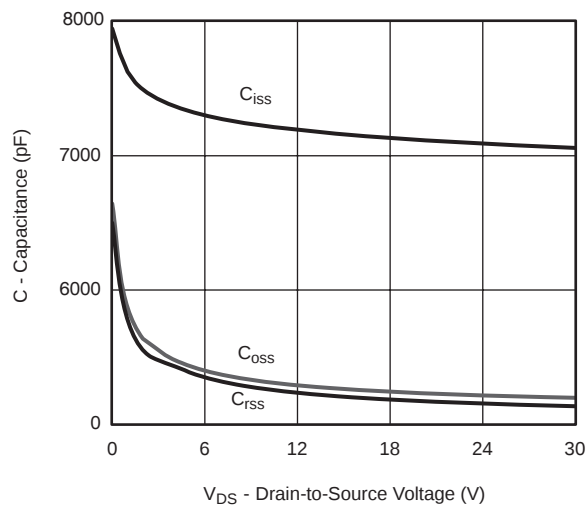
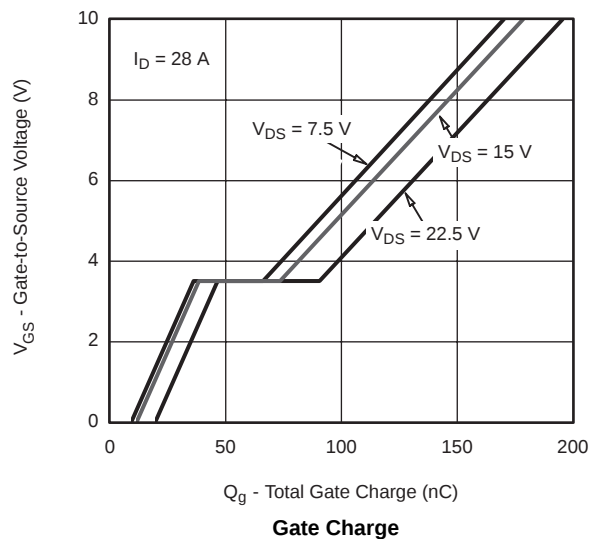
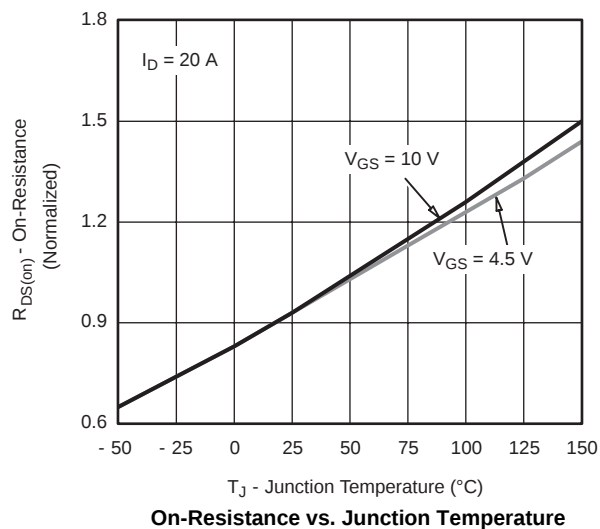
f. Maximum under Steady State conditions is 54 °C/W.






| SPECIFICATIONS $T_J = 25\text{ }^{\circ}\text{C}$ , unless otherwise noted |                         |                                                                                                                              |       |        |           |                        |
|----------------------------------------------------------------------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------|-------|--------|-----------|------------------------|
| Parameter                                                                  | Symbol                  | Test Conditions                                                                                                              | Min.  | Typ.   | Max.      | Unit                   |
| Static                                                                     |                         |                                                                                                                              |       |        |           |                        |
| Drain-Source Breakdown Voltage                                             | $V_{DS}$                | $V_{GS} = 0\text{ V}, I_D = -250\text{ }\mu\text{A}$                                                                         | - 30  |        |           | V                      |
| $V_{DS}$ Temperature Coefficient                                           | $\Delta V_{DS}/T_J$     | $I_D = -250\text{ }\mu\text{A}$                                                                                              |       | - 31   |           | mV/ $^{\circ}\text{C}$ |
| $V_{GS(th)}$ Temperature Coefficient                                       | $\Delta V_{GS(th)}/T_J$ |                                                                                                                              |       | 6.5    |           |                        |
| Gate-Source Threshold Voltage                                              | $V_{GS(th)}$            | $V_{DS} = V_{GS}, I_D = -250\text{ }\mu\text{A}$                                                                             | - 1.0 |        | - 3.0     | V                      |
| Gate-Source Leakage                                                        | $I_{GSS}$               | $V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$                                                                              |       |        | $\pm 100$ | nA                     |
| Zero Gate Voltage Drain Current                                            | $I_{DSS}$               | $V_{DS} = -30\text{ V}, V_{GS} = 0\text{ V}$                                                                                 |       |        | - 1       | $\mu\text{A}$          |
|                                                                            |                         | $V_{DS} = -30\text{ V}, V_{GS} = 0\text{ V}, T_J = 55\text{ }^{\circ}\text{C}$                                               |       |        | - 10      |                        |
| On-State Drain Current <sup>a</sup>                                        | $I_{D(on)}$             | $V_{DS} = -5\text{ V}, V_{GS} = -10\text{ V}$                                                                                | - 30  |        |           | A                      |
| Drain-Source On-State Resistance <sup>a</sup>                              | $R_{DS(on)}$            | $V_{GS} = -10\text{ V}, I_D = -20\text{ A}$                                                                                  |       | 0.004  |           | $\Omega$               |
|                                                                            |                         | $V_{GS} = -4.5\text{ V}, I_D = -15\text{ A}$                                                                                 |       | 0.006  |           |                        |
| Forward Transconductance <sup>a</sup>                                      | $g_{fs}$                | $V_{DS} = -15\text{ V}, I_D = -20\text{ A}$                                                                                  |       | 97     |           | S                      |
| Dynamic <sup>b</sup>                                                       |                         |                                                                                                                              |       |        |           |                        |
| Input Capacitance                                                          | $C_{iss}$               | $V_{DS} = -15\text{ V}, V_{GS} = 0\text{ V}, f = 1\text{ MHz}$                                                               |       | 7050   |           | pF                     |
| Output Capacitance                                                         | $C_{oss}$               |                                                                                                                              |       | 1375   |           |                        |
| Reverse Transfer Capacitance                                               | $C_{rss}$               |                                                                                                                              |       | 1215   |           |                        |
| Total Gate Charge                                                          | $Q_g$                   | $V_{DS} = -15\text{ V}, V_{GS} = -10\text{ V}, I_D = -20\text{ A}$                                                           |       | 130    | 250       | nC                     |
|                                                                            |                         |                                                                                                                              |       | 78     | 130       |                        |
| Gate-Source Charge                                                         | $Q_{gs}$                | $V_{DS} = -15\text{ V}, V_{GS} = -4.5\text{ V}, I_D = -20\text{ A}$                                                          |       | 29     |           |                        |
| Gate-Drain Charge                                                          | $Q_{gd}$                |                                                                                                                              |       | 37     |           |                        |
| Gate Resistance                                                            | $R_g$                   | $f = 1\text{ MHz}$                                                                                                           |       | 1.9    |           |                        |
| Turn-On Delay Time                                                         | $t_{d(on)}$             | $V_{DD} = -15\text{ V}, R_L = 15\text{ }\Omega$<br>$I_D \cong -1.0\text{ A}, V_{GEN} = -10\text{ V}, R_g = 1\text{ }\Omega$  |       | 25     | 40        | ns                     |
| Rise Time                                                                  | $t_r$                   |                                                                                                                              |       | 15     | 30        |                        |
| Turn-Off Delay Time                                                        | $t_{d(off)}$            |                                                                                                                              |       | 110    | 170       |                        |
| Fall Time                                                                  | $t_f$                   |                                                                                                                              |       | 30     | 50        |                        |
| Turn-On Delay Time                                                         | $t_{d(on)}$             | $V_{DD} = -15\text{ V}, R_L = 15\text{ }\Omega$<br>$I_D \cong -1.0\text{ A}, V_{GEN} = -4.5\text{ V}, R_g = 1\text{ }\Omega$ |       | 110    | 170       |                        |
| Rise Time                                                                  | $t_r$                   |                                                                                                                              |       | 100    | 150       |                        |
| Turn-Off Delay Time                                                        | $t_{d(off)}$            |                                                                                                                              |       | 100    | 150       |                        |
| Fall Time                                                                  | $t_f$                   |                                                                                                                              |       | 50     | 75        |                        |
| Drain-Source Body Diode Characteristics                                    |                         |                                                                                                                              |       |        |           |                        |
| Continuous Source-Drain Diode Current                                      | $I_S$                   | $T_C = 25\text{ }^{\circ}\text{C}$                                                                                           |       |        | 100       | A                      |
| Pulse Diode Forward Current <sup>a</sup>                                   | $I_{SM}$                |                                                                                                                              |       |        | 120       |                        |
| Body Diode Voltage                                                         | $V_{SD}$                | $I_S = -5\text{ A}$                                                                                                          |       | - 0.54 | - 1.1     | V                      |
| Body Diode Reverse Recovery Time                                           | $t_{rr}$                | $I_F = 3.5\text{ A}, dI/dt = 100\text{ A}/\mu\text{s}, T_J = 25\text{ }^{\circ}\text{C}$                                     |       | 50     | 100       | ns                     |
| Body Diode Reverse Recovery Charge                                         | $Q_{rr}$                |                                                                                                                              |       | 65     | 130       | nC                     |
| Reverse Recovery Fall Time                                                 | $t_a$                   |                                                                                                                              |       | 26     |           | ns                     |
| Reverse Recovery Rise Time                                                 | $t_b$                   |                                                                                                                              |       | 24     |           |                        |

Notes:

- a. Pulse test; pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$ .  
 b. Guaranteed by design, not subject to production testing.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

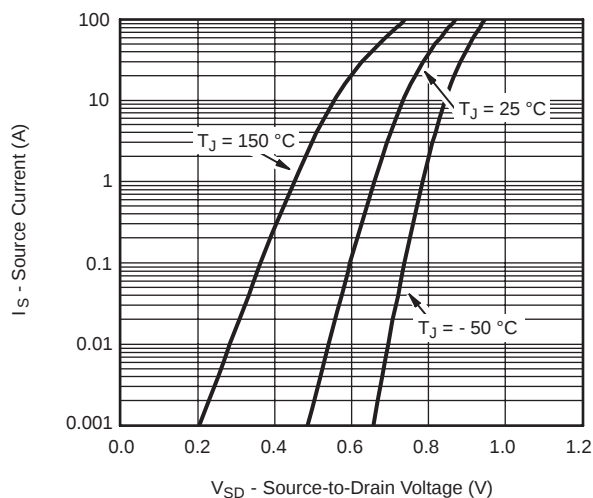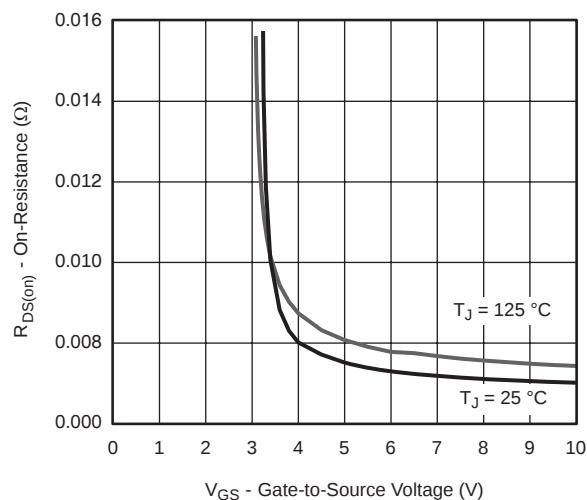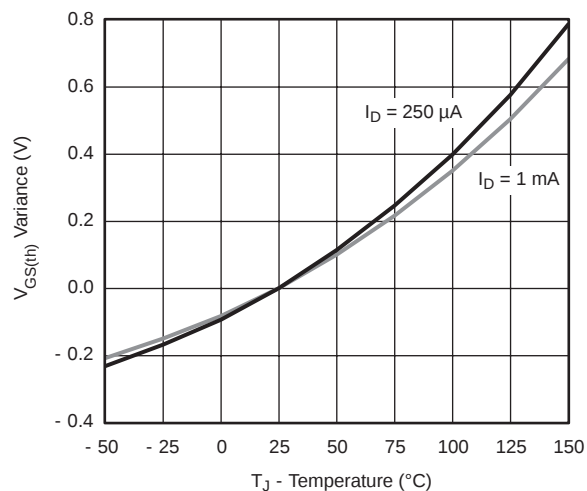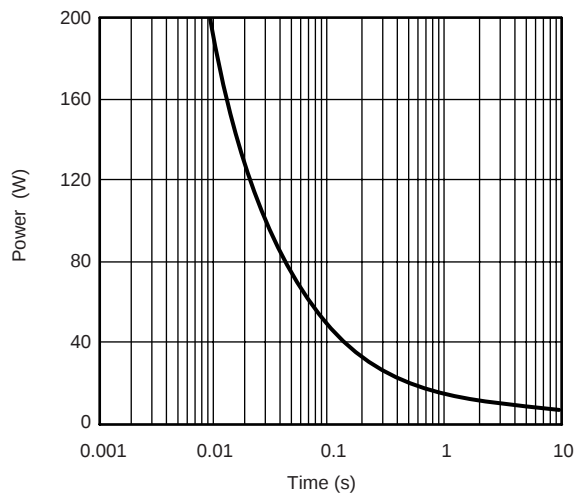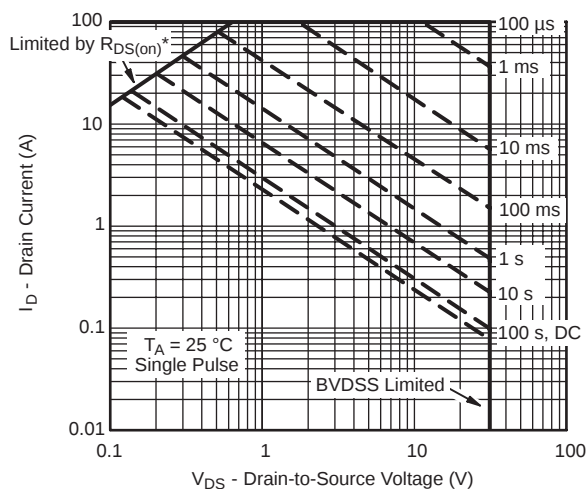
**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted

**Output Characteristics**

**Transfer Characteristics**

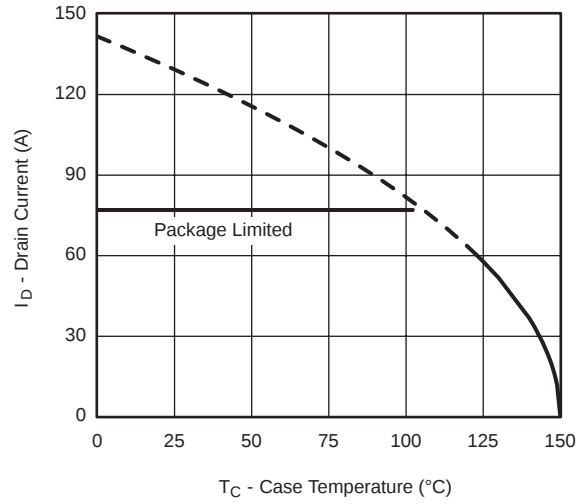**On-Resistance vs. Drain Current and Gate Voltage**

**Capacitance**

**Gate Charge**

**On-Resistance vs. Junction Temperature**

**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted

**Source-Drain Diode Forward Voltage**

**On-Resistance vs. Gate-to-Source Voltage**

**Threshold Voltage**

**Single Pulse Power, Junction-to-Ambient**


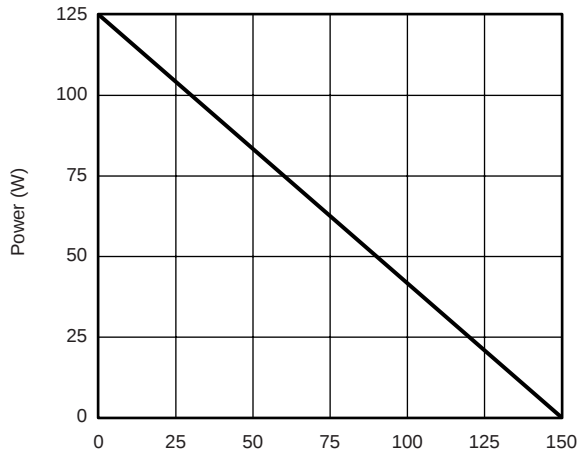
\*  $V_{GS} >$  minimum  $V_{GS}$  at which  $R_{DS(on)}$  is specified

**Safe Operating Area, Junction-to-Ambient**

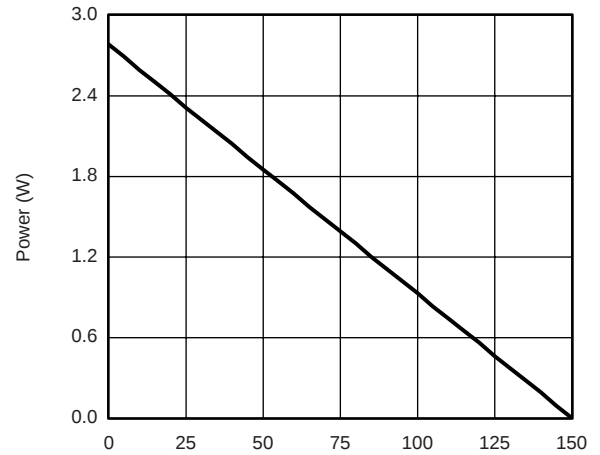
**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted



**Current Derating\***





**Power, Junction-to-Case**







**Power, Junction-to-Ambient**


\* The power dissipation  $P_D$  is based on  $T_{J(max)} = 150$  °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.

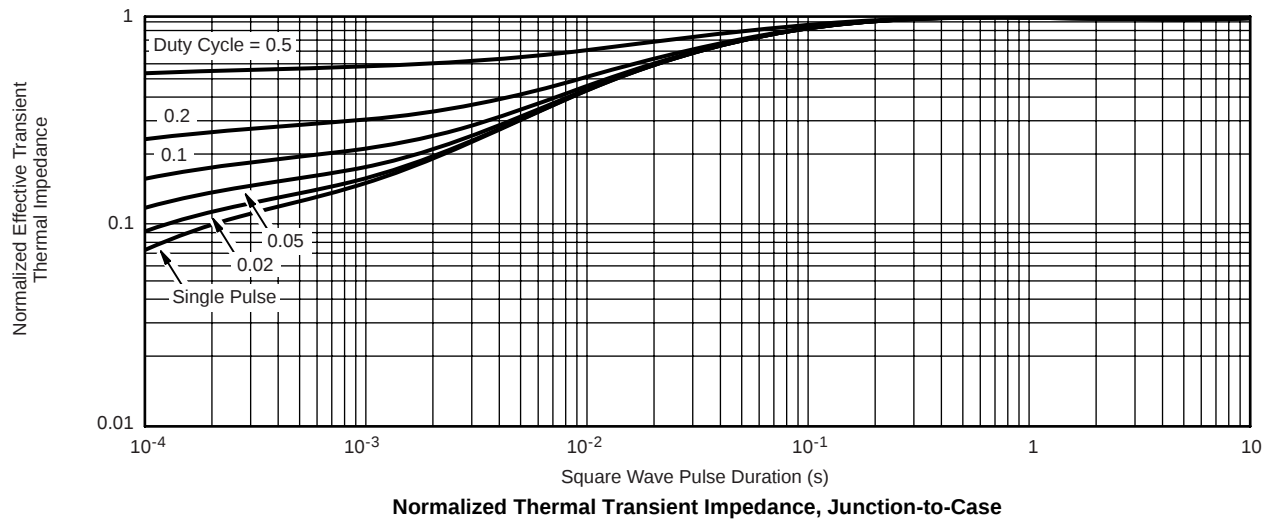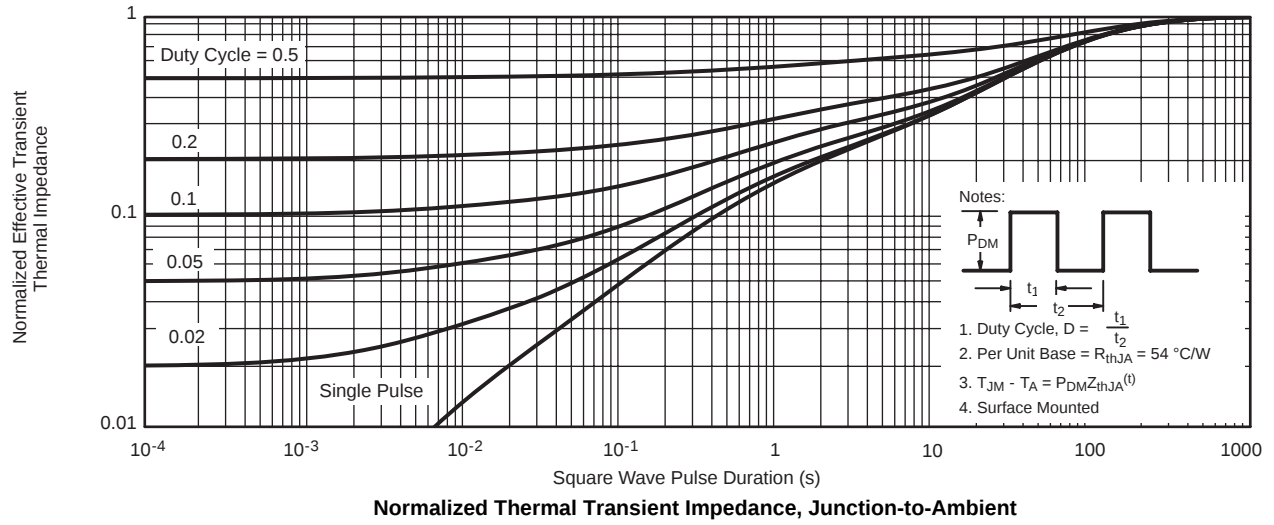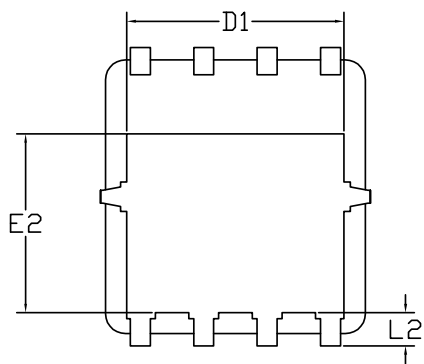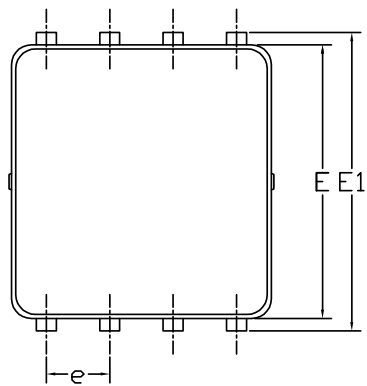**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted





VIEW 'A'  
(SCALE 5:1)

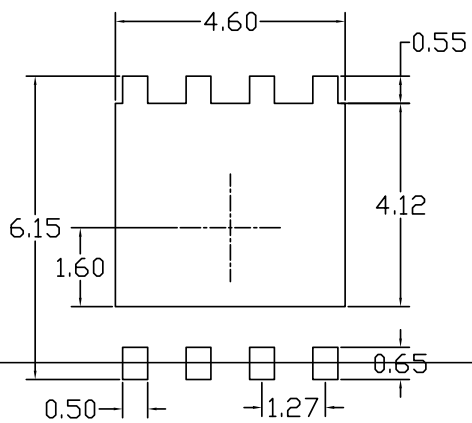

|    |          |           |
|----|----------|-----------|
| D1 | 4.35     | 0.171     |
| E2 | 3.625    | 0.143     |
| L2 | 0.68 REF | 0.027 REF |
|    | ---      | ---       |
|    | 0°       | 10°       |

NOTE  
1. t

UNIT: mm

# Disclaimer

All products due to improve reliability, function or design or for other reasons, product specifications and data are subject to change without notice.

Taiwan VBsemi Electronics Co., Ltd., branches, agents, employees, and all persons acting on its or their representatives (collectively, the "Taiwan VBsemi"), assumes no responsibility for any errors, inaccuracies or incomplete data contained in the table or any other any disclosure of any information related to the product.([www.VBsemi.com](http://www.VBsemi.com))

Taiwan VBsemi makes no guarantee, representation or warranty on the product for any particular purpose of any goods or continuous production. To the maximum extent permitted by applicable law on Taiwan VBsemi relinquished: (1) any application and all liability arising out of or use of any products; (2) any and all liability, including but not limited to special, consequential damages or incidental ; (3) any and all implied warranties, including a particular purpose, non-infringement and merchantability guarantee.

Statement on certain types of applications are based on knowledge of the product is often used in a typical application of the general product VBsemi Taiwan demand that the Taiwan VBsemi of. Statement on whether the product is suitable for a particular application is non-binding. It is the customer's responsibility to verify specific product features in the products described in the specification is appropriate for use in a particular application. Parameter data sheets and technical specifications can be provided may vary depending on the application and performance over time. All operating parameters, including typical parameters must be made by customer's technical experts validated for each customer application. Product specificatiuad all implied warranttiProduce□